


THE INFORMATION DISCLOSED ON THIS DRAWING IS PROPRIETARY. IT IS ISSUED FOR ENGINEERING USE ONLY AND MAY NOT BE REPRODUCED OR DISCLOSED, IN WHOLE OR IN PART, TO ANYONE WITHOUT THE DIRECT WRITTEN PERMISSION OF KRYSAL ENTERPRISES, INC. PARTS OR TOOLS MANUFACTURED TO MEET THE REQUIREMENTS OF THIS DRAWING MAY NOT BE USED BY OR SOLD TO ANYONE WITHOUT THE DIRECT WRITTEN PERMISSION OF KRYSAL ENTERPRISES.

REVISIONS			
REV	DESCRIPTION	DATE	APPD
A	Revise Floor tie down locations and lengths	1/16/08	C. A.
B	Revise 10 Ga Reinforcement for shoulder anchor locations	1/21/08	C. A.

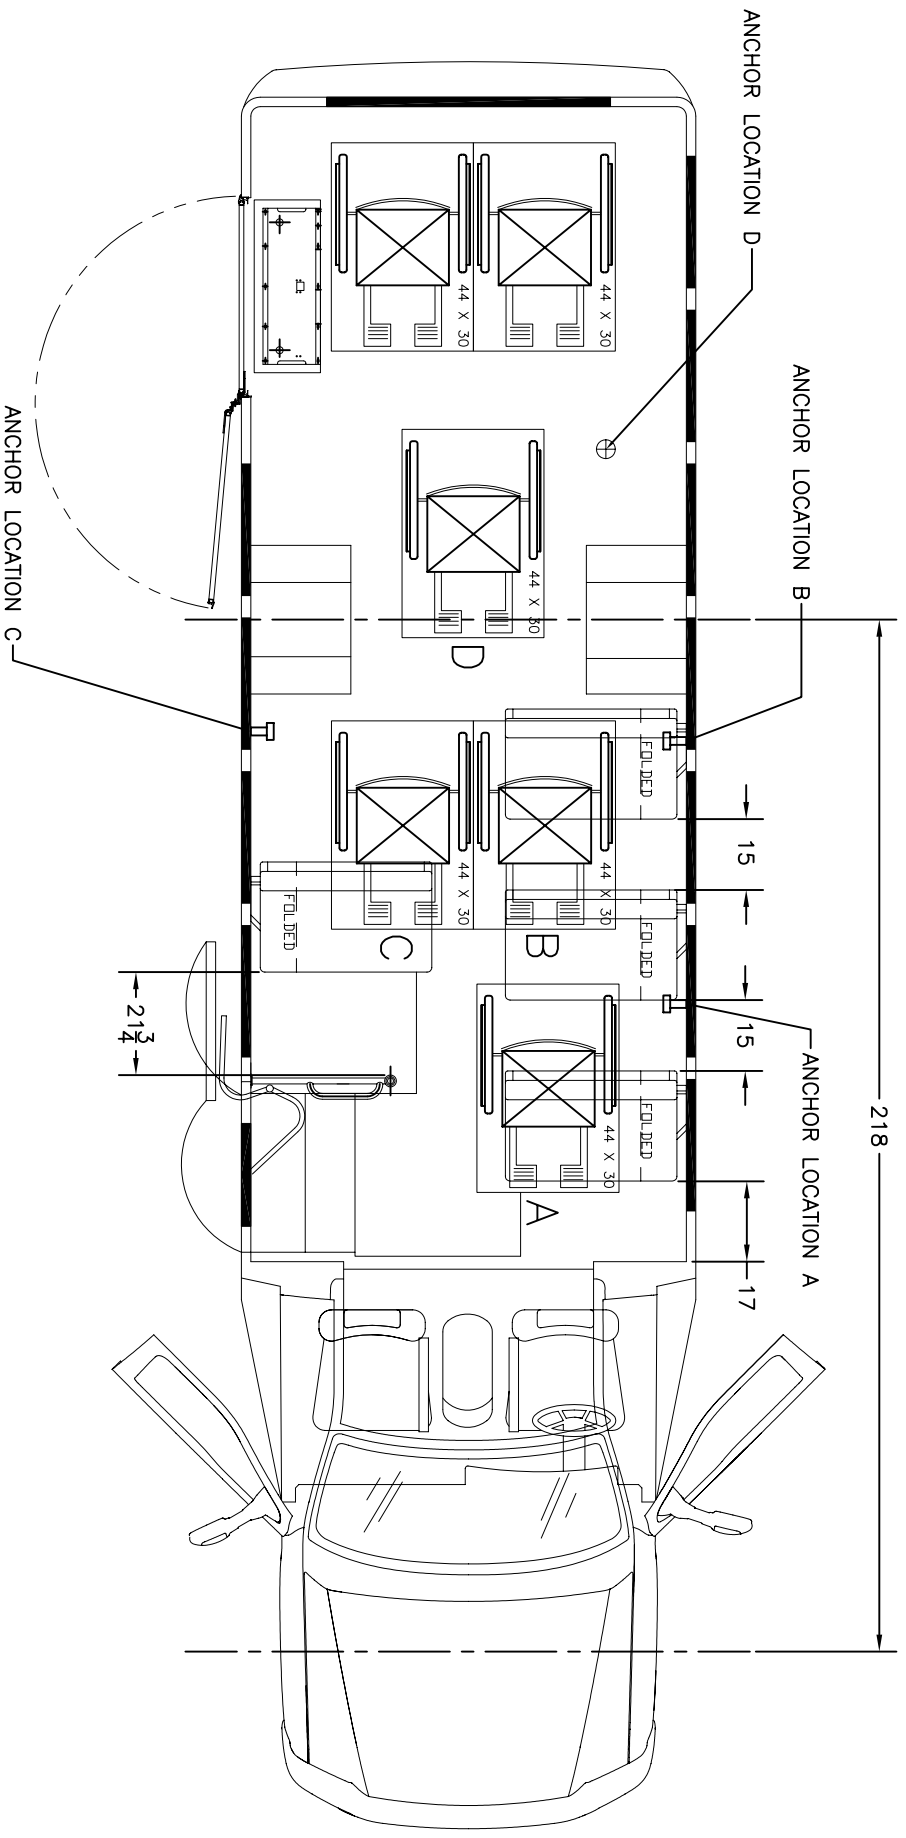

SPECIAL NOTE: ANCHOR POINT LOCATION HEIGHT FOR WHEEL CHAIR LOCATIONS A,B,C 69" FROM FINISHED FLOOR

NOTES: UNLESS OTHERWISE SPECIFIED

- 1) 7" MIN. SPACING.
- 2) 28" MIN. HIP TO KNEE SPACING.
- 3) CSA #

REV	DATE	DESCRIPTION	BY	APPD
-3	8/10/06	REVISED	M. MIDDLEMORE	APPD
-2				
-1				

ITEM NO.	QTY	DESCRIPTION	UNIT
1	1	STEEL ANCHOR	EA
2	1	CONCRETE ANCHOR	EA
3	1	WELD ROD	EA

ITEM NO.	QTY	DESCRIPTION	UNIT
1	1	STEEL ANCHOR	EA
2	1	CONCRETE ANCHOR	EA
3	1	WELD ROD	EA

KRYSAL ENTERPRISES
 2701 E. IMPERIAL HIGHWAY
 BREDA, CA 92821

MODEL 30
 11 + 2 PASSENGER, 6 W/C CAPACITY
 SHUTTLE BUS

SCALE: 1" = 1'-0"